


# NOLIMIT WALL

REGENT

LINEAR

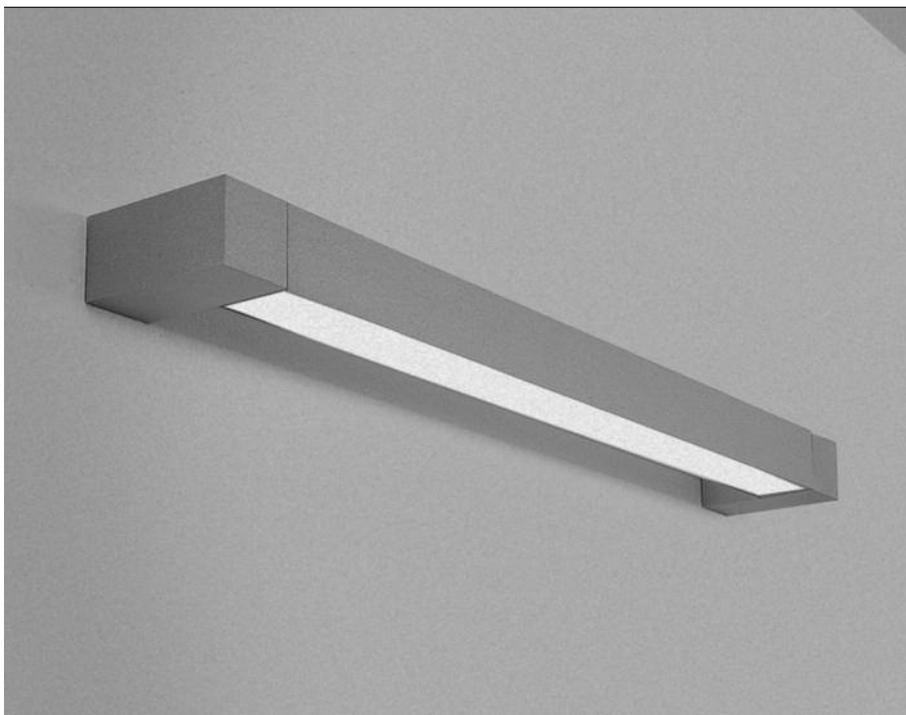

## Catalog Number

FIXTURE ONLY. Required mounting hardware and optional connecting hardware listed below.

**FIXTURE**  
NLT – NoLimit

**LAMPING**  
1T528 – (1) 28W T5  
1T554 – (1) 54W T5 high output

**VOLTAGE**  
120 – 120 Volt

**OPTIONS**  
FUS – Integral ballast fusing

**EXAMPLE:** NLT-1T554-120

## Specifications

### CONSTRUCTION

Fixture body constructed of aluminum.  
Endcaps constructed of die-cast aluminum.  
Body of fixture rotates 360 degrees for in-the-field flexibility with a combination of direct, indirect and asymmetric light distribution.  
See reverse for details.

### FINISH

Fixture finished in thermo painted metallic silver.

### SHIELDING

Lamp is shielded by a satin acrylic diffuser.

### ELECTRICAL

Fixture and all electrical components are U.L./C.U.L. damp location listed. Supplied with internal electronic ballast. Fusing may be specified.

### LAMPING



(1) 28 watt T5 or 54 watt T5 high output fluorescent lamp. Lamp not included.

### MOUNTING

Fixture mounts to Energie junction box. Corners also available to make non-linear shapes. See reverse for details.

**ADA COMPLIANT.**

## Dimensions




## Hardware for Wall Luminaires

- NLW-END** Pair of end blocks for mounting a system.
- NLW-FDK** Wall feed kit.  
Can be located at any end or connector block.
- NLW-JNR** Wall 180° linear connector.

# NOLIMIT WALL



## Photometrics

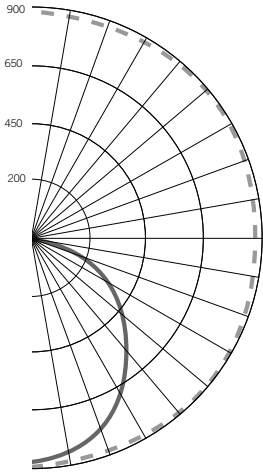

### CANDELA DISTRIBUTION

	0	45	90
0	880	880	880
5	872	872	881
15	831	830	837
25	751	750	754
35	639	639	642
45	507	509	512
55	368	370	374
65	236	237	242
75	118	119	122
85	27	28	29
95	0	0	0
105	0	0	0
115	0	0	0
125	0	0	0
135	0	0	0
145	0	0	0
155	0	0	0
165	0	0	0
175	0	0	0
180	0	0	0

### LUMINAIRE

**Description:** NoLimit Wall 1 54 watt high output T5 lamp.

**Catalog Number:** NLT-1T554-120

**Efficiency:** 49.1%

**Distribution:** 0% indirect, 100% direct

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXT
0 - 30	662.76	14.9	30.3
0 - 40	1062.66	23.9	48.6
0 - 60	1786.48	40.1	81.7
0 - 90	2185.51	49.1	100
90 - 120	0	0	0
90 - 130	0	0	0
90 - 150	0	0	0
90 - 180	0	0	0
0 - 180	2185.51	49.1	100


### LUMINANCE (Candela / sq meter)

ANGLE	0-DEG	45-DEG	90-DEG
45	12948	12966	13045
55	11577	11621	11753
65	10068	10128	10311
75	8255	8311	8520
85	5730	5792	5896

### COEFFICIENTS OF UTILIZATION


PCC PW RCR	80				70				50			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	0
0	.58	.58	.58	.58	.57	.57	.57	.57	.55	.55	.55	.50	.50	.50	.49
1	.54	.51	.49	.48	.52	.50	.48	.47	.48	.47	.45	.45	.44	.43	.42
2	.49	.45	.42	.39	.48	.44	.41	.39	.42	.40	.38	.39	.38	.36	.35
3	.45	.40	.36	.33	.44	.39	.35	.33	.38	.35	.32	.35	.33	.31	.30
4	.41	.35	.31	.28	.40	.35	.31	.28	.34	.30	.27	.31	.29	.27	.26
5	.38	.32	.27	.24	.37	.31	.27	.24	.30	.27	.24	.28	.26	.23	.22
6	.35	.29	.24	.21	.34	.28	.24	.21	.27	.24	.21	.26	.23	.21	.20
7	.33	.26	.22	.19	.32	.26	.22	.19	.25	.21	.19	.24	.21	.18	.18
8	.30	.24	.20	.17	.30	.24	.20	.17	.23	.19	.17	.22	.19	.17	.16
9	.28	.22	.18	.15	.28	.22	.18	.15	.21	.18	.15	.20	.17	.15	.14
10	.27	.20	.16	.14	.26	.20	.16	.14	.20	.16	.14	.19	.16	.14	.13

## Details

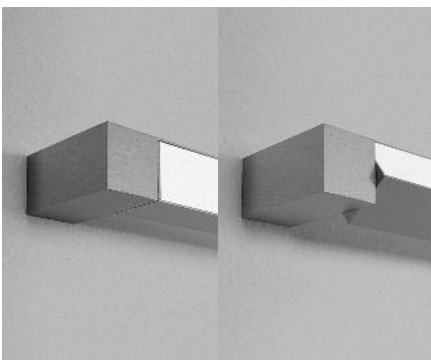

### END BLOCKS (NLW-END)

End blocks installed at each end of a wall run allow the fixtures to rotate 360°. NLW-END ordered separately.

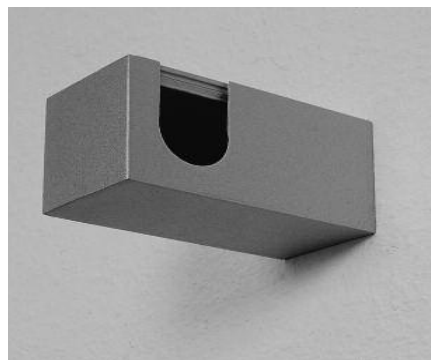

### 180° LINEAR CONNECTOR (NLW-JNR)

Available 180° linear connectors allow fixtures to be joined together in straight runs and allow 360° rotation. NLW-JNR ordered separately.